

# CITTÀ


## Point Pendant

### Installation & Assembly Instructions

This product should only be installed by a registered electrician. Please read product manual before installation.


#### Step 1

Remove the bracket from the ceiling rose kit, and run the wires and ground wire through the center hole of the bracket, and then fix the bracket onto the ceiling board with screws

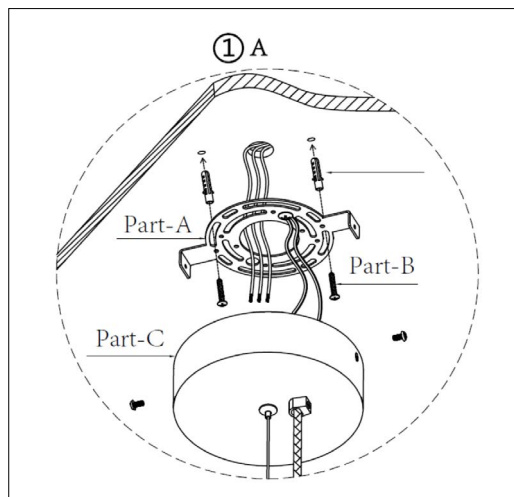


#### Step 2

Connect the positive and negative wires and ground wire to the terminal according to the instruction specified in the drawing above.

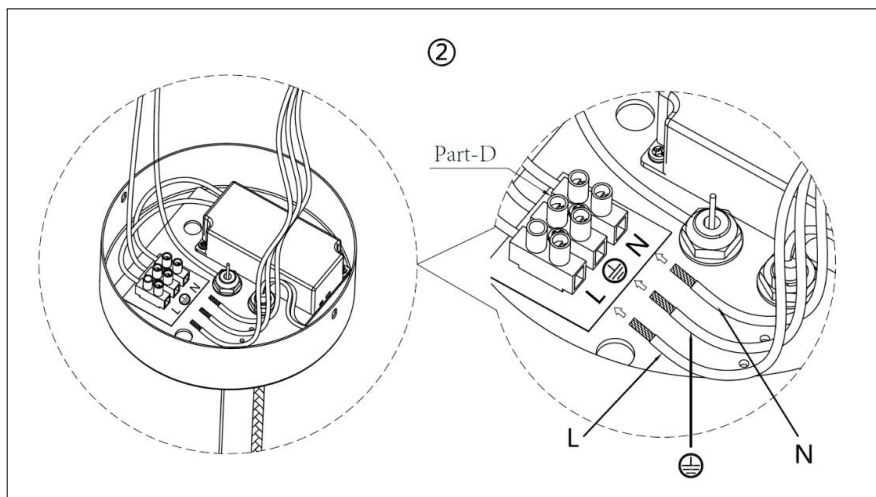

#### Step 3

Install the ceiling rose under the bracket, fix the ceiling rose by two screws in sides.

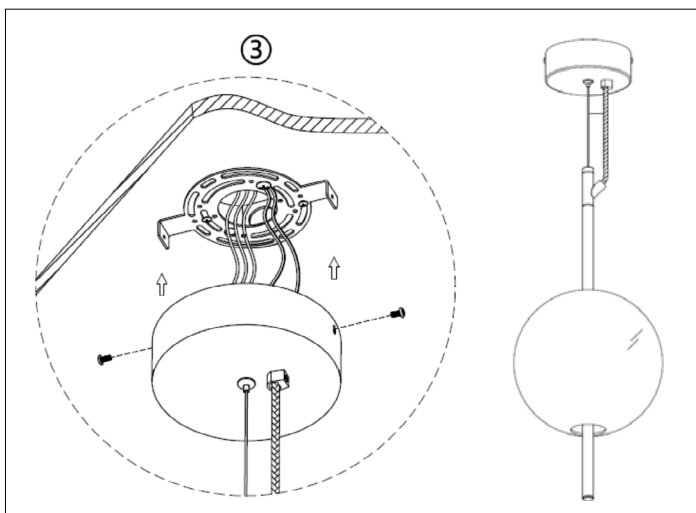

# CITTÀ

## Point Pendant Extension

### Step 1

Remove the bottom cover of the lamp stem of the pre-positioned Point Pendant.


### Step 3

Hold the Point Pendant and then rotate the Extension to connect them through the screw.

A Point Pendant can be connected with maximum 3pcs of Extensions.

### Step 2

Make the bottom of the stem of the pre-positioned Point Pendant into the inside of the Point Extension.

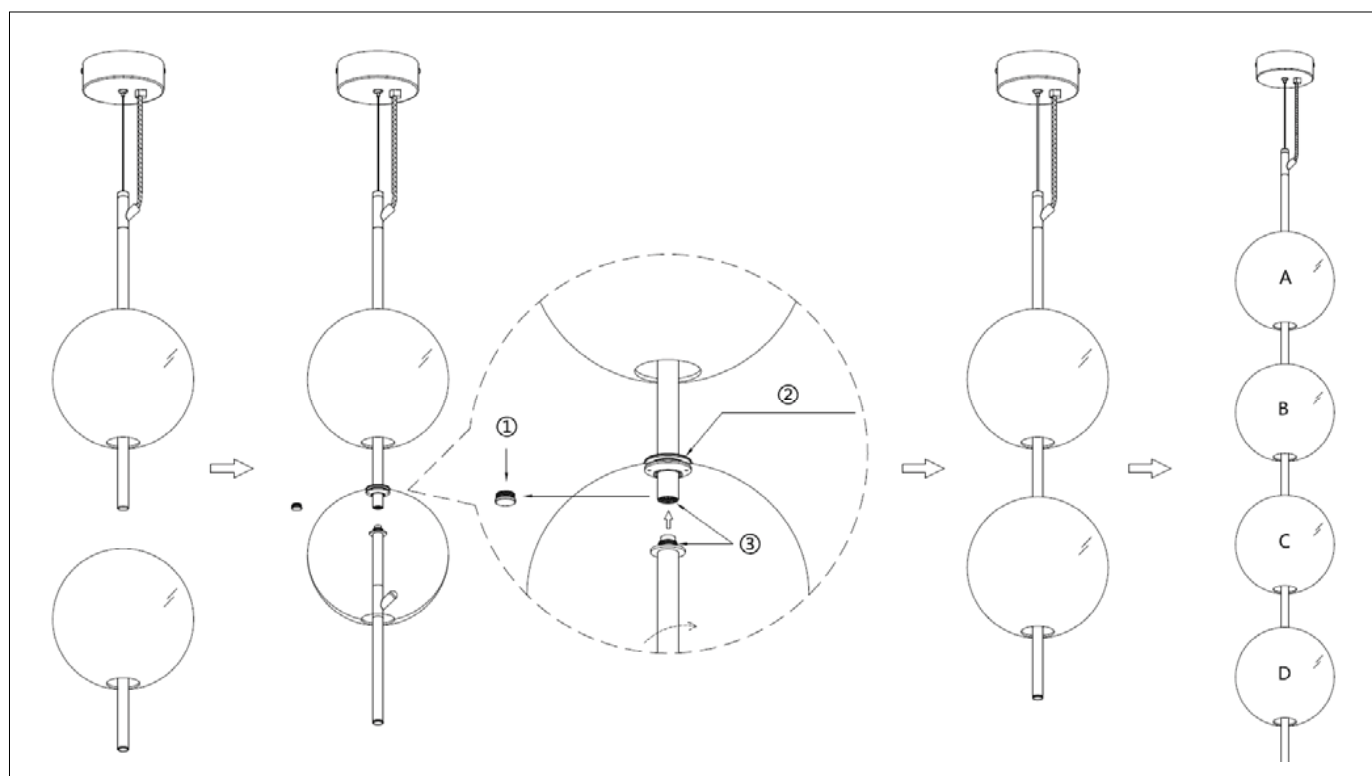

## Point Pendant

Product Name	SKU	CCT.	Input	Power	Lamp Shade Colour	Lamp Body Colour
Pendant Large	EBL0007PLU	2700K	220-240VAC	Max. 9W	Clear	White
Pendant Large	EBL0008PLU	2700K	220-240VAC	Max. 9W	Smoke Grey	Black
Pendant Small	EBL0007PSU	2700K	220-240VAC	Max. 9W	Clear	White
Pendant Small	EBL0008PSU	2700K	220-240VAC	Max. 9W	Smoke Grey	Black
Extension Large	EBL0007PEL	2700K	24VDC	2W	Clear	White
Extension Large	EBL0008PEL	2700K	24VDC	2W	Smoke Grey	Black
Extension Small	EBL0007PES	2700K	24VDC	2W	Clear	White
Extension Small	EBL0008PES	2700K	24VDC	2W	Smoke Grey	Black

MADE IN CHINA

TA:25°C



## Read the following instructions before handling the product:

1. Installation of this product must be carried out by a qualified electrician only.
2. Switch off the power of the mains supply and respectively of the connection lead before handling the product at installation, maintenance and cleaning etc.
3. Only to be operated with the specified driver!
4. Only for indoor use in dry conditions and not in dirt endangered rooms or in areas with high air humidity!
5. The product must not be exposed to strong mechanical loads.
6. Do not cover the product, as free air circulation must be provided. The product must not be modified and use only parts which are supplied with the product or are described as accessories.
7. Operate the product only if it is working correctly.
8. Switch off the product with a malfunction immediately and operate it again only after examination by an electrical
9. specialist in case of the following: Visible damage, it stop's working, smoke, steam or crackling sounds, overheating is observed.
10. Repairs or work on mains voltage may only be carried out by qualified electricians.
11. If the above instructions are not followed, short circuits and electrical shocks may occur.
12. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or similar qualified person in order to avoid a hazard.
13. The light source contained in this light shall only be replaced by the manufacturer or his service agent or similar qualified person.
14. Switch off the power of the mains supply as well as the connection lead before installing the product.
15. The LED bulbs have a warranty of 50,000 hours or 3 years, replacement transformers are available but need to be fitted by a qualified electrician.
16. Please note: glass blowing is an organic hand made process, so there may